

# U04 / U04W

Single 1 × 4.5" Full Range Speaker



## FEATURES

- 1-Way sealed point source cabinet.
- Single 4.5" full-range driver working from 105 Hz (@ -10 dB).
- 60° × 60° dispersion.
- Ultra-compact design and wide sound definition.
- Easy hanging with bracket or on a microphone stand.




## SPECIFICATIONS

Frequency Response	150 Hz - 16 kHz (±4 dB) / 105 Hz - 20 kHz (-10 dB)
Dispersion (H × V)	60° × 60°
Sensitivity (1 W / 1 m)	92 dB
SPL (1 m)	109 dB (Continuous) / 115 dB (Peak)
Power Rating (AES)	50 W
Nominal Impedance	8 ohm
Driver	4.5" Full Range Driver / 25 mm Voice Coil
Enclosure	Sealed
Fittings	1/4" Flying Points × 4, 5/8" Flying Points × 1
Connectors	Spring Terminals
Dimensions (W × D × H)	134 × 134 × 136 mm
Weight	1.5 kg

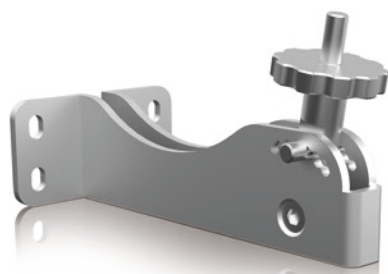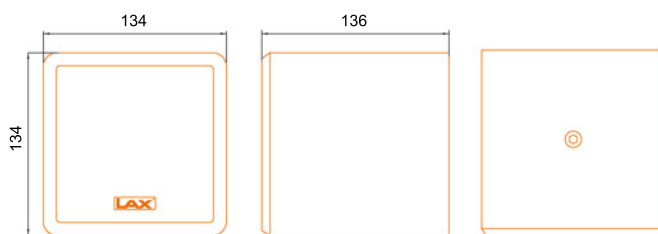

U04 Bracket

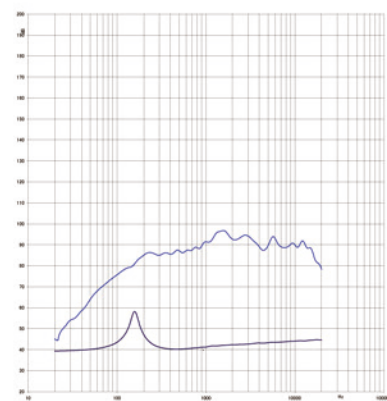

Impedance Curve