



# ATEM Mini Pro ISO

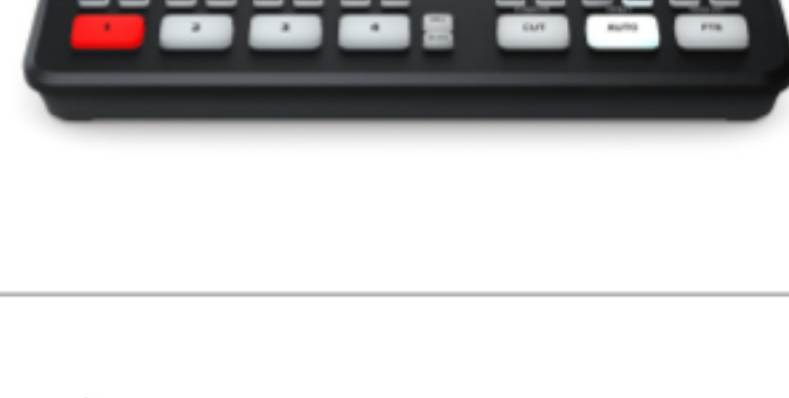

Affordable live switcher with 4 standards converted HDMI inputs, USB webcam out, audio mixer with EQ and dynamics, 2D DVE, transitions, green screen chroma key, 20 stills for titles and much more! ATEM Mini Pro also includes recording to USB disks in H.264 format, a built in hardware streaming engine for YouTube Live, Facebook, Twitch and more, plus multiview to see all cameras on a single monitor. Plus with the ATEM Mini Pro ISO model you also get recording of 5 streams including all input as clean feeds for editing, plus a DaVinci project file for fast edit turnaround and Blackmagic RAW file relinking for finishing in Ultra HD.

## Connections

<b>Total Video Inputs</b> 4	<b>Timecode Connection</b> None	<b>HDMI Program Outputs</b> 1
<b>Total Outputs</b> 2	<b>HDMI Video Inputs</b> 4 x HDMI type A, 10-bit HD switchable. 2 channel embedded audio.	<b>Ethernet</b> Ethernet supports 10/100/1000 BaseT for live streaming, software control, software updates and direct or network panel connection.
<b>Total Aux Outputs</b> 1	<b>Video Input Re-Sync</b> On all 4 HDMI inputs.	<b>Computer Interface</b> 1 x USB Type-C 3.1 Gen 1 for external drive recording, webcam out, software control, software updates and panel connection.
<b>Total Audio Inputs</b> 2 x 3.5mm stereo mini jack.	<b>Frame Rate and Format Converters</b> On all 4 HDMI inputs.	

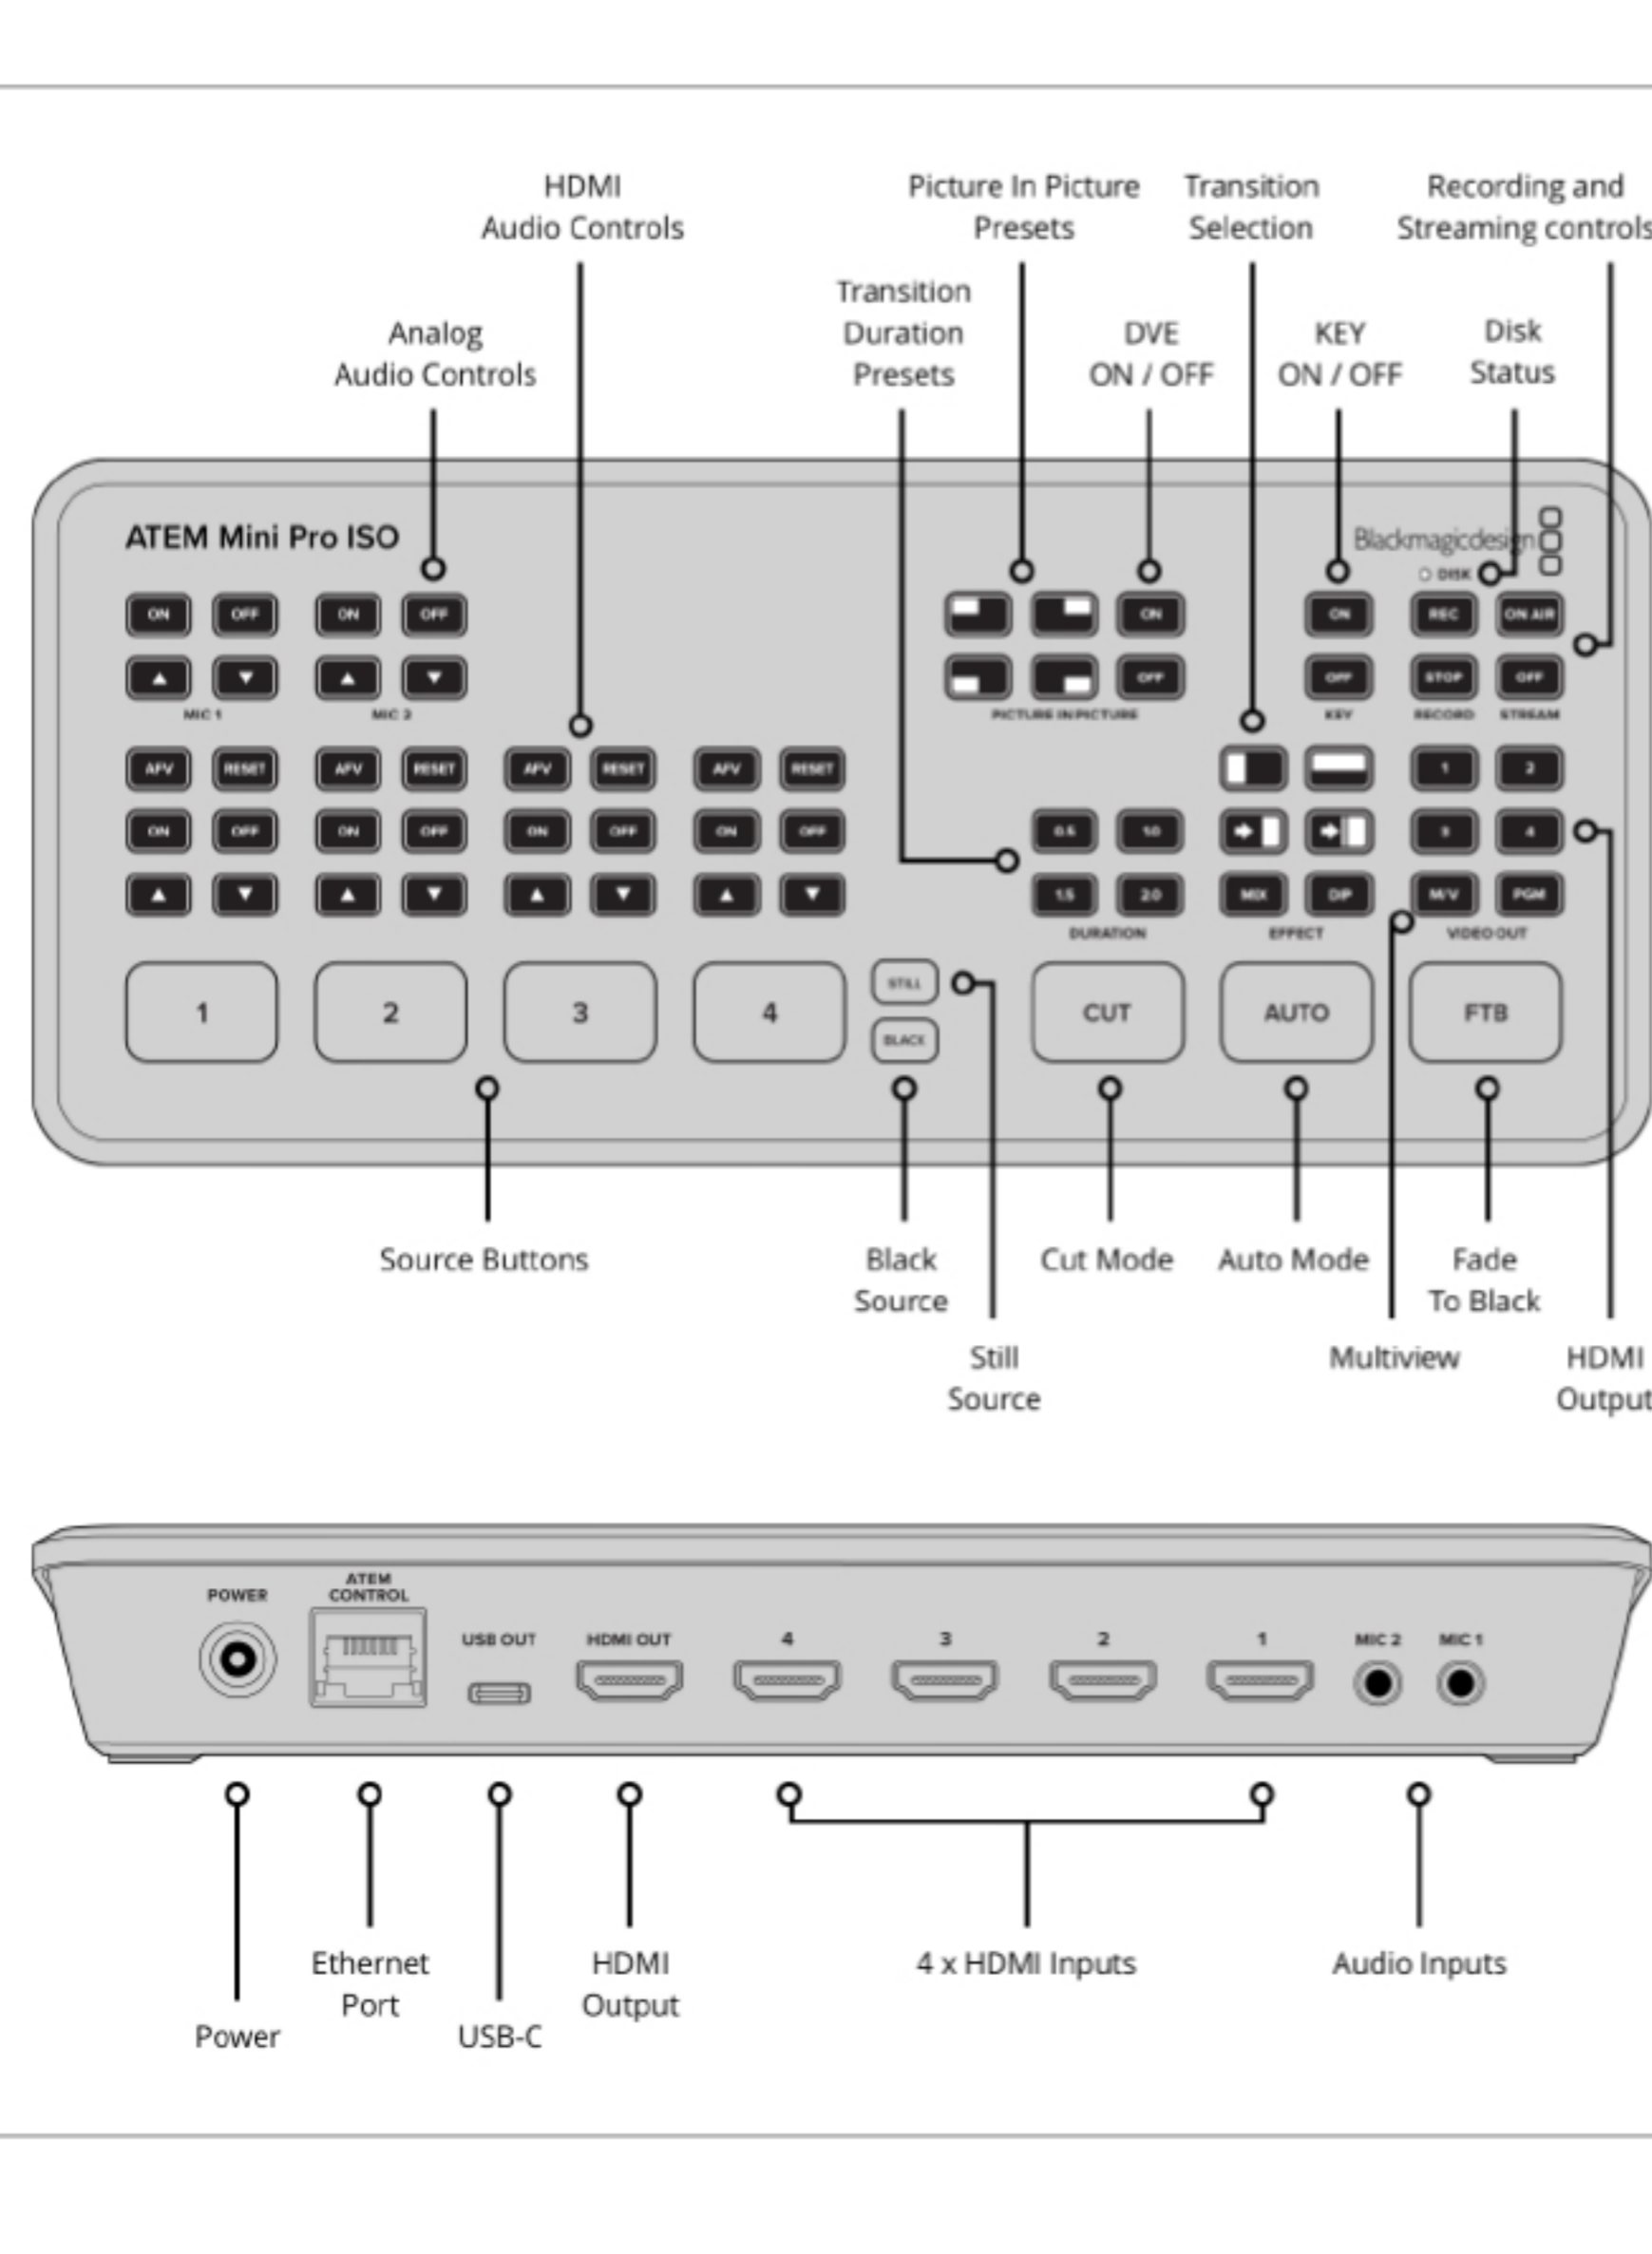

## Standards

<b>HD Video Input Standards</b> 720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080i50, 1080i59.94, 1080i60	<b>Video Streaming Standards</b> 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60	<b>Color Space</b> Rec 709
<b>HD Video Output Standards</b> 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60	<b>Ultra HD Video Standards</b> None	<b>HDMI Input Resolutions from Computers</b> 1280 x 720p 50Hz, 59.94Hz and 60Hz 1920 x 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94 and 60Hz 1920 x 1080i 50 and 59.94Hz 60Hz
<b>Video Sampling</b> 4:2:2 YUV	<b>Color Precision</b> 10-bit	<b>Colorspace Conversion</b> Hardware based real time.

## Product Specifics

<b>Upstream Keys</b> 1	<b>Downstream Keys</b> 1	<b>Advanced Chroma Keys</b> 1	<b>Linear/Luma Keys</b> 2	<b>Timecode Key</b> DVE only.	<b>Total Number of Layers</b> 5	<b>Pattern Generators</b> 1	<b>Color Generators</b> 2	<b>DVE with Borders and Drop Shadow</b> 1	<b>Interface</b> Minimum monitor resolution of 1366 x 768.
---------------------------	-----------------------------	----------------------------------	------------------------------	----------------------------------	------------------------------------	--------------------------------	------------------------------	--	---

## Audio

<b>Audio Mixer</b> 6 input x 2 channel mixer. Selectable On/Off/Audio-Follow-Video per channel plus separate gain control per channel. Level and Peak metering. Plus new Fairlight audio enhancements: Compressor, Gate, Limiter, 6 bands of parametric EQ. Master gain control.	<b>Analog Input</b> Unbalanced stereo	<b>Max Input Level</b> +6dBV
	<b>Analog Input Delay</b> Up to 8 frames	<b>Mic Plug In Power</b> Available on both 3.5mm mini jack connections.
	<b>Input Impedance</b> 1.8k	

## Streaming

**Direct Streaming**  
ATEM Mini Pro ISO supports direct live streaming over ethernet using Real Time Messaging Protocol (RTMP).

## Recording

<b>Direct Recording Video and Audio</b> USB-C 3.1 Gen 1 expansion port can record directly to external media.	<b>Video Recording</b> 4 x HDMI ISO inputs as H.264 .mp4 files at up to 70Mb/s quality at the ATEM video standard with AAC audio. 1 x Program out as H.264 .mp4 file at the Streaming quality setting and at the ATEM video standard with AAC audio.	<b>Audio Recording</b> 6 x 2 channel audio inputs recorded as separate 24-bit 48KHz .wav files. Including 2 x analog stereo audio inputs and 4 x HDMI 2 channel embedded audio inputs.
		<b>Switching</b> Program switching recorded as a DaVinci Resolve project .drp file.

## Media Format

Supports media formatted ExFAT (Windows/Mac) or HFS+ (Mac) file system.

## Multi View Monitoring

<b>Multi View Monitoring</b> 1 x 10 Views including left right configurable Program/Preview, 4 HDMI inputs, Media Player, Streaming Status, Recording Status and Audio Meters.	<b>Multi View Video Standard</b> HD
---	--

## Media Player

<b>Media Players</b> 1	<b>Channels</b> Fill and key for each Media Player.	<b>Media Pool Still Image Capacity</b> 20 with fill and key.	<b>Media Pool Still Image Format</b> PNG, TGA, BMP, GIF, JPEG and TIFF.
---------------------------	--	---	--


## Control

<b>Control Panel</b> Built in control panel. Software control panel with camera control included. Supports optional hardware panel.	<b>Control Panel Compatibility</b> Includes ATEM Software Control Panel. Also compatible with ATEM 1 M/E Advanced Panel, ATEM 2 M/E Advanced Panel and ATEM 4 M/E Advanced Panel. ATEM Mini Pro ISO can be configured using Blackmagic Videohub Hardware Panel Setup utility to route sources to destinations using Videohub Smart Control Pro and Videohub Master Control Pro.	<b>Control Panel Included</b> ATEM Software Control Panel included free for Mac 10.14 Mojave, Mac 10.15 Catalina or later and Windows 10 64 bit only.
<b>Control Panel Connection</b> Ethernet supports 10/100/1000 BaseT. Ethernet used for direct connection between panel and chassis or via network. ATEM Mini Pro ISO also supports direct USB-C connection. Ethernet or USB-C used for updating the software.		

## Software

<b>Software Updates</b> Using USB or Ethernet connection directly connected to Mac OS X or Windows computers. Includes ATEM Switcher Utility.	<b>Configuration</b> Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Switcher Utility connected via USB to chassis.
--	---

## Operating Systems

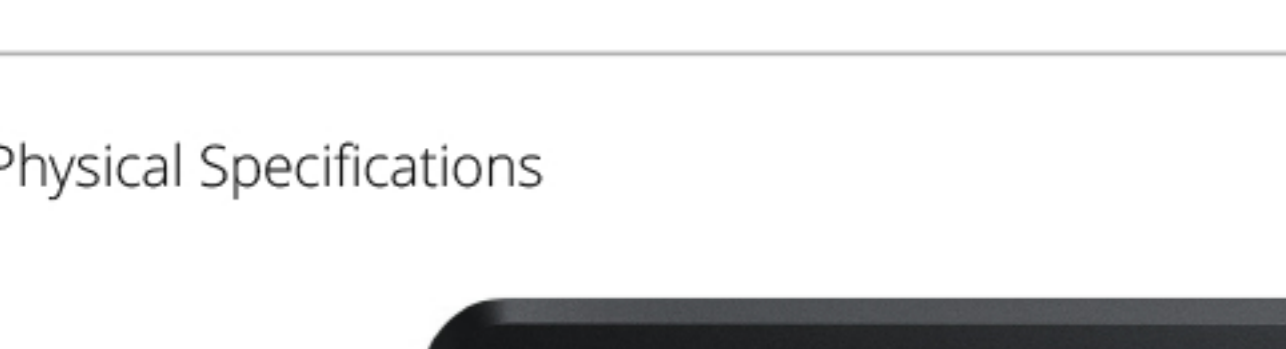


Mac 10.14 Mojave, Mac 10.15 Catalina or later. Windows 10, 64-bit.

## Power Requirements

<b>Power Supply</b> 1 x External 12V power supply.	<b>Power Usage</b> 36W
---	---------------------------

## Physical Specifications

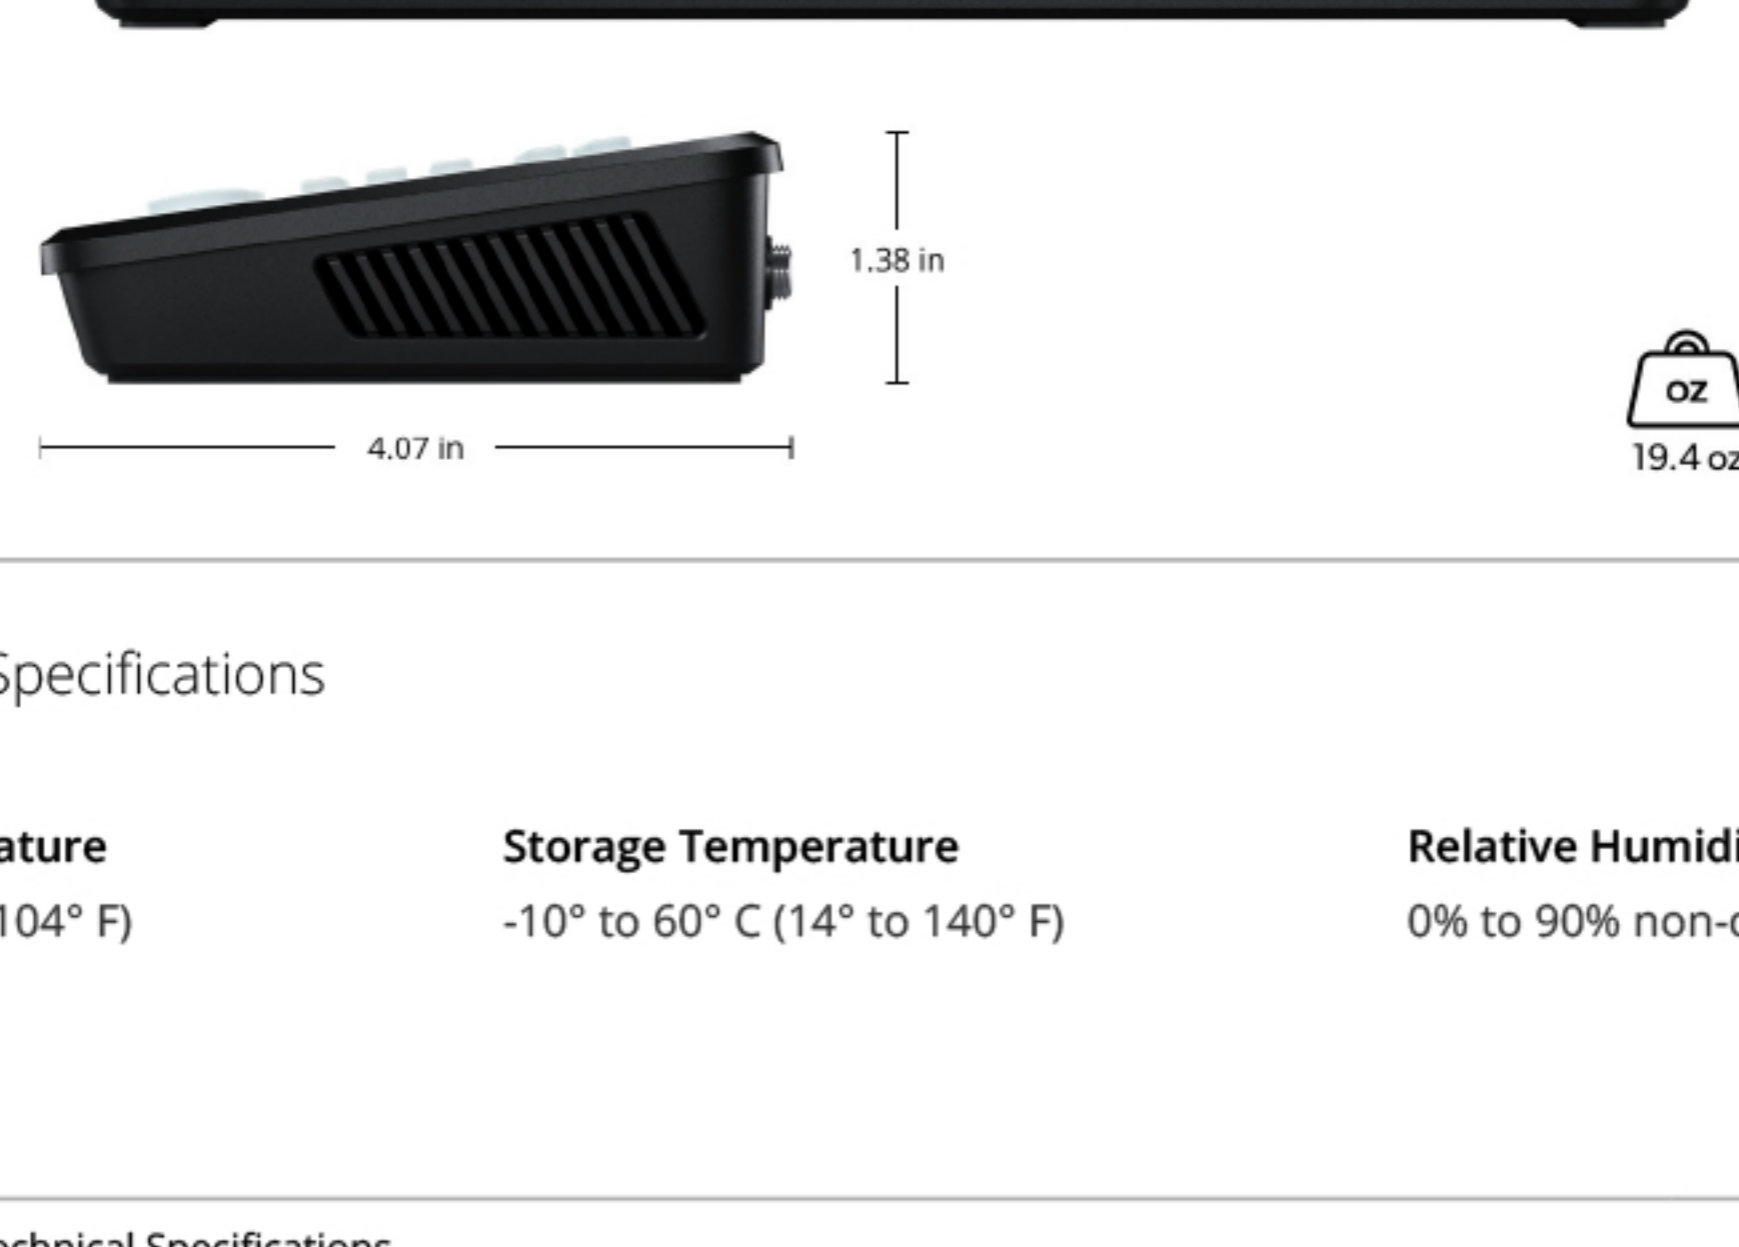

## Environmental Specifications

<b>Operating Temperature</b> 5° C to 40° C (41° - 104° F)	<b>Storage Temperature</b> -10° to 60° C (14° to 140° F)	<b>Relative Humidity</b> 0% to 90% non-condensing
--	---	--

## What's Included

ATEM Mini Pro ISO  
External 12V DC power supply with international socket adapters

## Warranty

12 Months Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

## Blackmagic Design Authorized Reseller